

PRODUCT HIGHLIGHTS

- Advanced 230kg/350kg doubleload capacity.
- Four-wheel driven with grade ability 45%.
- Powered by battery, environment-friendly.
- The weight of boom decreases, stable and energy-saving.




NAB20EJ 18m Electric Articulating Boom Lifts

Technical parameters



Model	NAB20EJ
Dimensions	
Max. Working Height	20.2m
Max. Platform Height	18.2m
Max. Up and Over Clearance	8.0m
Max. Working Radius	11.6m
(A) Platform Width	0.76m
(B) Platform Length	1.8m
(C) Height-Stowed	2.38m
(D) Length-Stowed	8.49m
(E) Width	2.49m
(F) Wheelbase	2.5m
Ground Clearance-Center	0.3m
Standard container transportation	
Performance	
Max. Lift Capacity	230kg(unlimited)/350kg(limited)
Platform Occupancy	2/3
Platform Rotation	±80°
Turntable Rotation	360°continuous
Vertical jib Rotation (up/down)	±70°
Drive Speed - Stowed	5.0km/h
Gradeability-Stowed	45%
Max. Working Angle	3°
Turning Radius (outside)	4.18m
Drive and Steer	4x2
Weight	9100kg
Tire	33x12-20
Power	
Battery	48V/420Ah
Control Voltage	12V
Pump Power	12kw
Drive Motor	3.3kw
Charger	48V/60A
Hydraulic Tank	105L
Emergency Power System	12V
Optional	
LFP Battery	Optional
Solid Non-marking Tires	Optional

18m Electric Articulating Boom Lifts

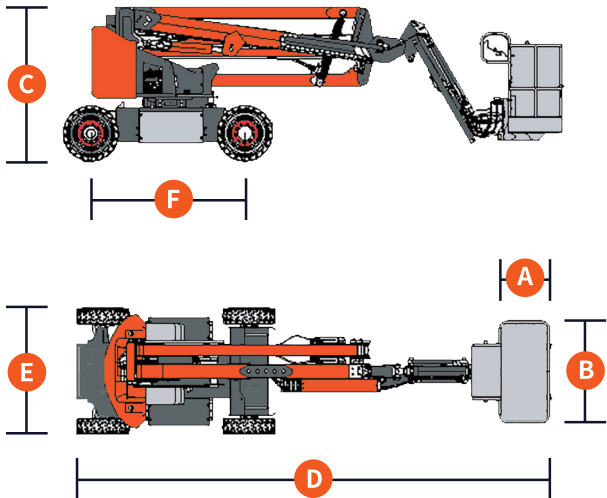

Working Range of 18m Electric Articulating Boom Lifts

