

www.noblelift.com


NOBLELIFT

Stand-on Reach Truck

RRS-150/180

1500/1800 kg Capacity

Lifting height: 3000/6000 mm



Why choose between price and quality **WHEN YOU CAN HAVE BOTH!**

HIGHLIGHTS

- ▶ Product Highlights
- ▶ Rated load: 1500/1800 kg
- ▶ Lifting height: 3000/6000 mm, three-stage full free mast
- ▶ Minimum Aisle width: 1690 mm
- ▶ 48V AC control system
- ▶ AC drive, electric steering
- ▶ Active suspension stabilization system
- ▶ Cornering speed limiter
- ▶ Drive suspension structure


Compact, High Performance, and High Productivity

NOBLELIFT's innovative RRS-150-180 series integrates advanced technology into a new compact design, delivering durable, cost-effective, and safe performance.




Excellent automatic suspension control system

Suspension control system

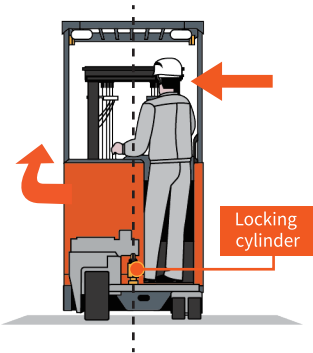


Without suspension control system

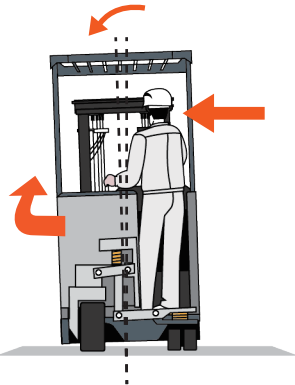


Suspension control:

When lateral acceleration is detected, the suspension locking cylinder quickly and stably locks, effectively suppressing excessive front wheel lift.

Suspension control system




Without suspension control system

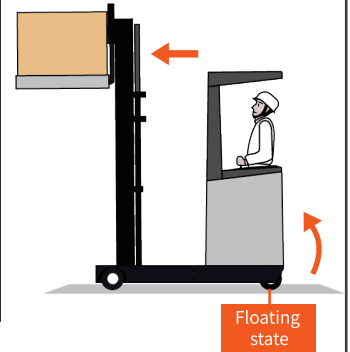


Suspension control:

When the mast is extended forward and handling loads at a high position, the suspension sway locks, preventing the rear end from lifting and enhancing stability during high-lift operations. When the mast is in the low position, the suspension floats, providing excellent road adaptability.


Curve Speed Control



Slower speed for smaller turning radiuses




Fast speed for larger turning radiuses

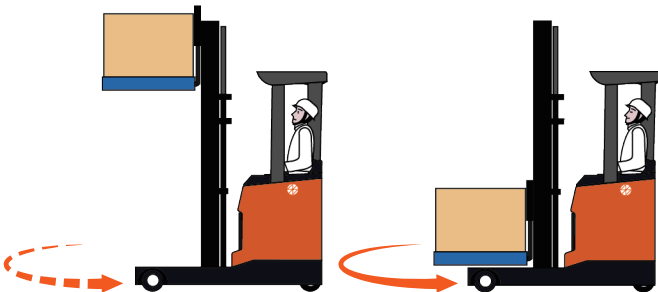




The Curve Speed Control automatically and precisely controls turning speed based on the mast height and turning radius, ensuring smoother and more reliable cornering during load-lifting operations.

Front Wheel Assisting Brake System

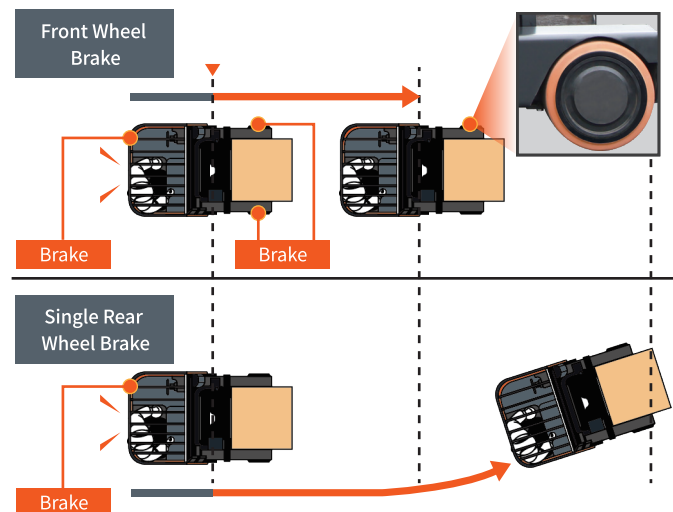

A highly efficient assisting brake is specially added to the front load-bearing wheel. When the vehicle is heavily loaded or driving on slippery roads, this assisting brake works in conjunction with the drive wheel brake system to provide stable and reliable braking force, effectively shortening stopping distances and significantly reducing vehicle skidding.

Drive axle maintenance and disassembly are convenient.

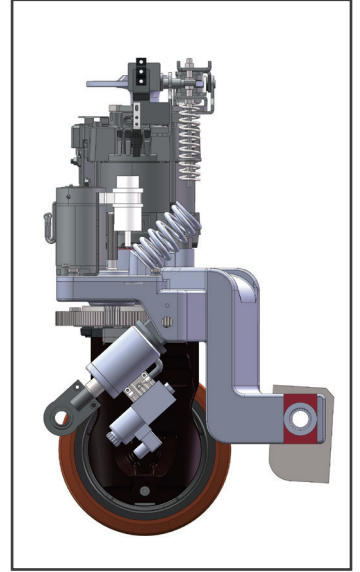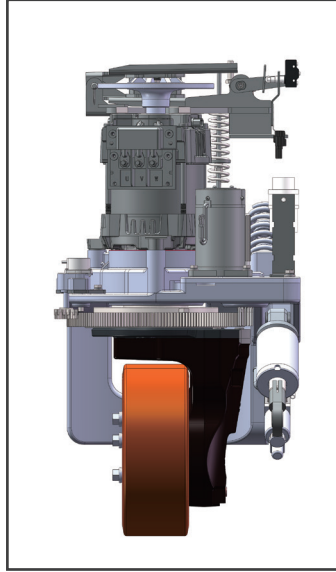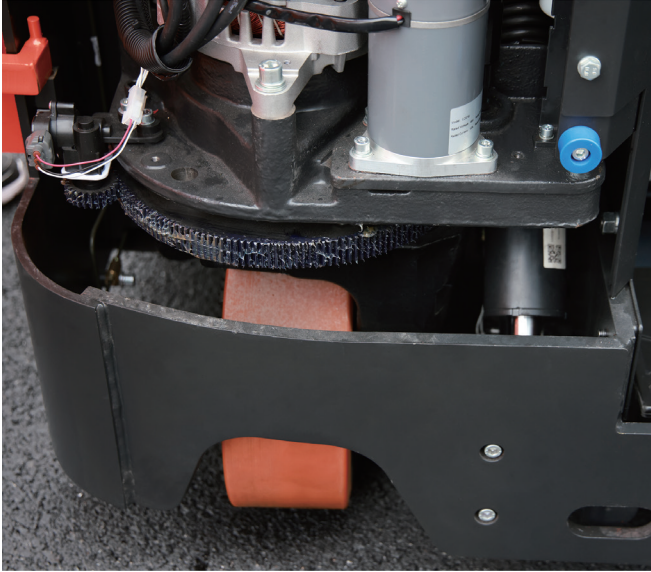

The drive axle is easily assembled and repaired. The drive section is assembled as a single unit, simplifying the process and facilitating after-sales maintenance.

Intelligent, safe, and reliable



Multi-function color LCD instrument panel




Centralized central control console



Hydraulic oil filler



LED work lights and optional reverse blue spotlight

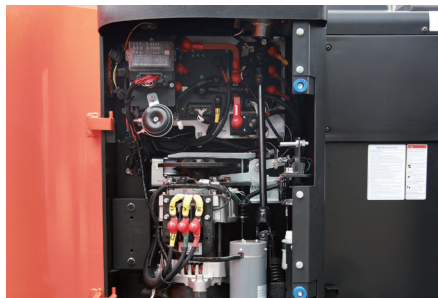

Various control systems from various brands



Battery charging port

Smooth Start-off, Travel, and Braking,
Stress Free Operation in Your Hand.




Three-stage mast

Lift	h3(mm)	5000	5500	6000
Height of mast, lowered	h1(mm)	2270	2430	2595
Height of mast, extended	h4(mm)	5885	6385	6885
Free lift	h2(mm)	1385	1545	1710



Two-stage mast

Lift	h3(mm)	3000	3500	4000
Height of mast, lowered	h1(mm)	1995	2245	2495
Height of mast, extended	h4(mm)	3885	4385	4885
Free lift	h2(mm)	415	415	415

Structural Diagram

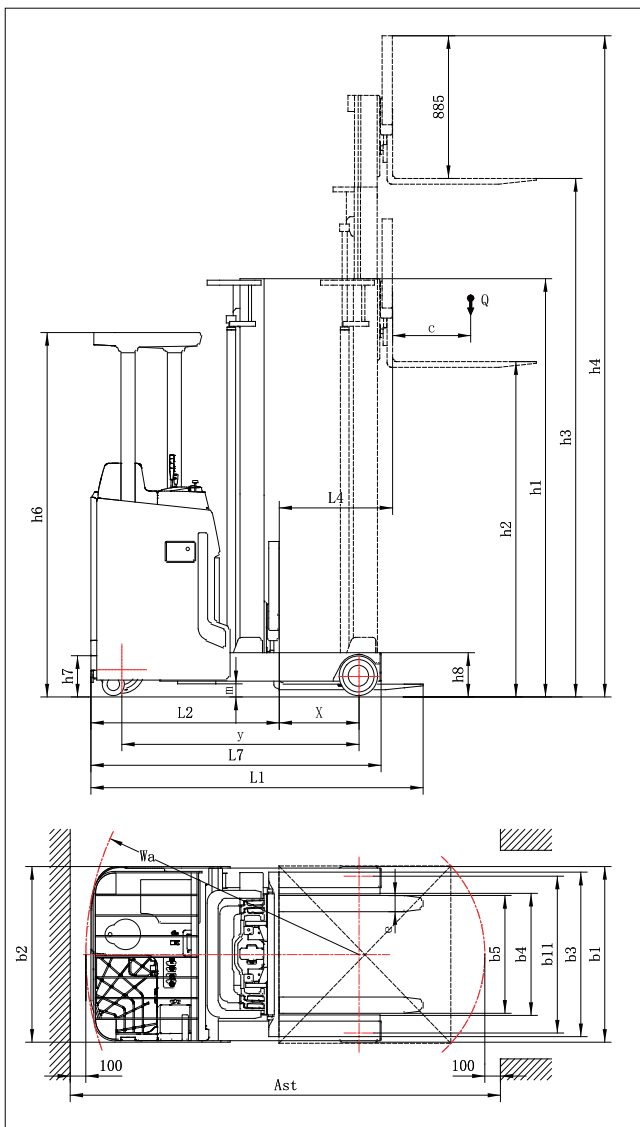

Load curve graph

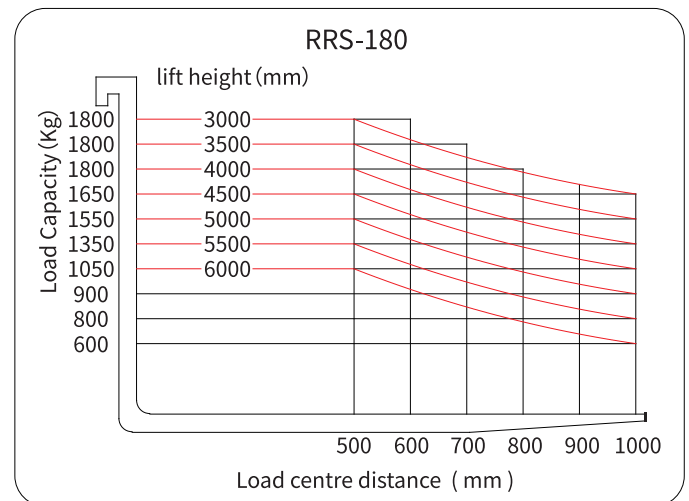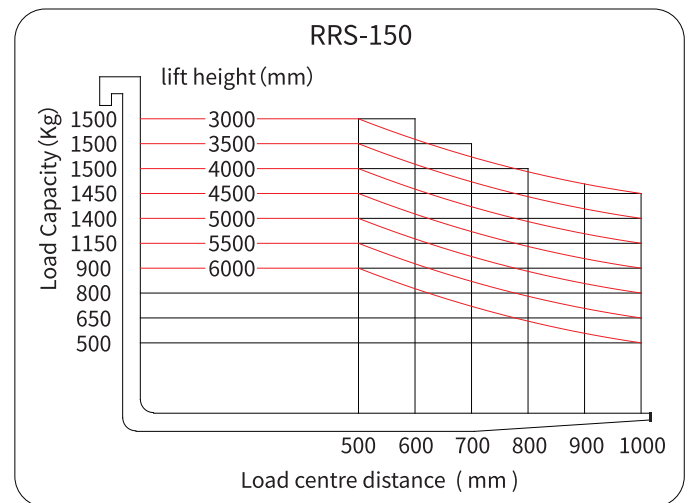

Type sheet for industrial truck acc. to VDI 2198

No.2025.10.24

Dentification	1.1	Manufacturer		NOBLELIFT	NOBLELIFT
	1.2	Model		RRS-150	RRS-180
	1.3	Drive		Electric	Electric
	1.4	Operator type		Stand	Stand
	1.5	Load capacity / rated load	Q (kg)	1500	1800
	1.6	Load centre	c (mm)	500	500
	1.8	Load distance, centre of support arm wheel to face of forks	x (mm)	400/175	550/175
	1.9	Wheelbase	y (mm)	1365	1515
Weights	2.1	Service weight including battery	kg	3200	3280
	2.3	Axle load, mast retracted without load, drive/support arm wheel	kg	2020/1180	2124/1156
	2.4	Axle load, mast extended with load, drive/support arm wheel	kg	705/3950	595/4685
	2.5	Axle load, mast retracted with load, drive/support arm wheel	kg	1877/2823	1930/3350
Wheels	3.1	Drive/support arm wheel		PU	PU
	3.2	Wheel size, front	Øxw (mm)	310 x120	310 x120
	3.3	Wheel size, rear	Øxw (mm)	254 x 120	254 x 120
	3.4	Wheel size,Rear, Caster	Øxw (mm)	150 x 80	150 x 80
	3.5	Wheels, number front/rear (x=driven wheels)		2/1x+2	2/1x+2
	3.7	Track width, rear	b11 (mm)	970	970
Dimensions	4.1	Tilt of fork, forward/backward	$\alpha/\beta(^{\circ})$	4°/-2°	4°/-2°
	4.2	Height, mast extended	h1 (mm)	1995	1995
	4.3	Free lift	h2 (mm)	415	415
	4.4	Lift height	h3 (mm)	3000	3000
	4.5	Extended mast height	h4 (mm)	3885	3885
	4.7	Height of overhead guard (cab)	h6 (mm)	2260	2260
	4.8	Platform height	h7 (mm)	260	260
	4.10	Height of support arms	h8 (mm)	275	275
	4.15	Height of lowered forks	h13 (mm)	40	40
	4.19	Overall length	l1 (mm)	2085	2085
	4.20	Length to face of forks	l2 (mm)	1165	1165
	4.21	Overall width	b1 (mm)	1090	1090
	4.22	Fork dimensions	s/e/l (mm)	35/100/920	35/100/920
	4.23	Fork carriage ISO 2328, class/type A, B		2/A	2/A
	4.25	Width across forks	b5 (mm)	220-730	220-730
	4.26	Distance between support arms	b4 (mm)	750	750
	4.28	Reach distance	l4 (mm)	575	725
	4.31	Ground clearance, with load, below mast	m1 (mm)	80	80
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	80	80
	4.33	Aisle width for pallets 1100 x 1100	Ast(mm)	2650	2700
Performance data	4.35	Turning radius	Wa (mm)	1605	1755
	4.37	Length across support arms	l7 (mm)	1705	1855
	5.1	Travel speed, with/without load	km/h	10/10	10/10
	5.2	Lift speed, with/without load	m/s	0.30/0.56	0.30/0.56
	5.3	Lowering speed, with/without load	m/s	0.50/0.55	0.50/0.55
	5.4	Reach speed, with/without load	m/s	0.22 / 0.24	0.22 / 0.24
Electric motor	5.8	Max. gradeability, with/without load	%	10/10	10/10
	5.10	Service brake		Hydraulic/electric	Hydraulic/electric
	6.1	Drive motor rating S2 60 min	kW	4.9	4.9
	6.2	Lift motor rating S3 15%	kW	8	8
	6.4	Battery voltage, nominal capacity K5	V/Ah	48/280	48/375
Other	6.5	Battery weight	kg	515	545
	8.1	Electric and controller		AC	AC
	8.4	Sound level at the driver' s ear according to EN 12 053	dB(A)	60	60

A GLOBAL LEADER

NOBLELIFT CHINA

Address: 528 Changzhou Road, Taihu
Sub-district, Changxing, Zhejiang 313100 China
Tel: 86-572-6210817 6210311
Fax: 86-572-6210777 6128612
Email: info@noblelift.com
Http: www.noblelift.com www.noblelift.cn

NOBLELIFT NORTH AMERICA

Address: 2461 S Wolf Road Des Plaines, IL 60018
Tel: 001-847-595-7100
Fax: 001-847-595-7200
Email: sales@nobleliftna.com
Http: www.nobleliftna.com

NOBLELIFT SOUTH EAST ASIA

No. 7, Jalan Astaka U8/84A, Seksyen U8, Bukit Jelutong,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel: +603 7831 8555
Email: sales@nobleliftsea.com
https: www.nobleliftsea.com

NOBLELIFT SOUTH EAST ASIA (Vietnam) CO., LTD.

Address: 3rd floor, No. 107, Street 37, Van Phuc
Residential Area, Hiep Binh Phuoc Ward, Thu
Duc City, Ho Chi Minh City, Vietnam
Tel: 84-902 598 460
E-mail: marketingvn@nobleliftsea.com
www.nobleliftsea.com.vn

NOBLELIFT RUSSIA

ООО «Ноблелифт Рус», 195067, Санкт-Петербург
пр. Маршала Блюхера, д. 78, литер Б
Тел.: +7-800-700-28-97
Email: sales@noblelift.com.ru
Http: www.noblelift.com.ru

NOBLELIFT EUROPE

Industriepark 2, 48739 Legden, Germany
Tel : +49 2566 90902-0
Email: Mail@Noblelift-Germany.com
Http: www.Noblelift.com

NOBLELIFT KOREA CO., LTD.

Address: 715-9 Jubook-ri, Cheoin-gu, Yongin-si,
Kyunggi-do, Korea
Tel: 82-031 334 1828
E-mail: info@noblelift.com
www.noblelift.com

NOBLELIFT CANADA INC.

Address: 850, Ellingham Avenue, Pointe-Claire, province
of Québec, Canada, H9R 3S4
Tel: 1-514 697 0117
E-mail: info@nobleliftca.com
www.nobleliftcanada.com

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD.



Official website



Our Wechat



LinkedIn



facebook



YouTube

